



Extruded Rubber Hose – Long Length.

Manufactured in ISO 9002 Quality Accredited Factory, using computer controlled Laser technology to ensure dimensional accuracy.

Aquaflex General Purpose Water Delivery. Type RE - A114

Material: Extruded Black EPDM [35%] plus NR/SBR [65%]. Excellent Ozone & Abrasion resistance. Smooth Cover.

Services: Fire fighting equipment/contractor hose/general purpose hose.

Pressure Rating: 14 Bar [200psi] WP. 4:1 SF

Length 100m

Standard Sizes: nd/mm x od

12 x 23

20 x 28

25 x 36

Ariaflex Air Hose. Type RE - A118

Material: Yellow EPDM [35%] plus NR/SBR [65%]. Smooth finish with excellent ozone and abrasion resistance. Suitable for compressed air services.

Pressure Rating: 18Bar [250 psi] WP. 4:1 SF

Length 100m

Standard Sizes: nd mm x od

12 x 21

20 x 30

25 x 37

Multiflex multipurpose Oil resistant Hose. Type RE - M318

Material: Nitrile rubber for oil resistance. Red cover.

Pressure Rating: 18 Bar [250 psi] WP. 4:1 SF

Length 100m

Standard Sizes: nd mm x od

10 x 16

12 x 21

16 x 24

20 x 30

25 x 37

Another Pacflex Quality Product

Pacific Flexibles pl
PO Box 904, Cloverdale, WA 6985, Australia
Office/Warehouse: 133 Chisholm Cr, Kewdale.

Tel +61-8-9453 2828
Fax +61-8-9359 1933
Email pg@pacflex.net


Train Air Brake Hose

Rubber hose with special black smooth inner tube, high strength synthetic plies reinforcements.

Conforms fully to **AS 2435 standard, Type 1.**

1. Black, smooth, synthetic rubber tube.
2. Synthetic plies reinforcement.
3. Layer of synthetic rubber encapsulating the textile reinforcements.
4. Black, smooth (cloth finish), synthetic rubber cover, abrasion, oil, ozone, and weather resistant.

Markings are in accordance to AS2435, clause 1.5.

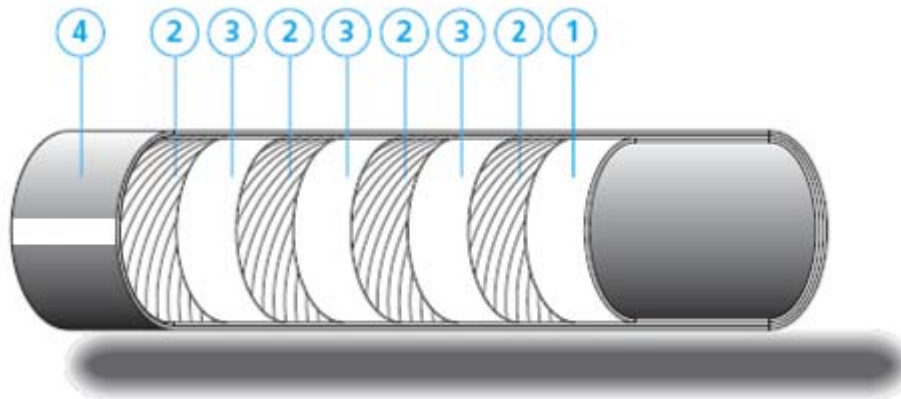

I.D. mm	O.D. mm	WP Bar	BP Bar AS1180.5A	WEIGH T Kg/mt	BENDIN G RADIUS mm	Max Length M	Temp Range -10 C to + 65C
10	25	10	50	0.56	80	40	
12	27	10	50	0.61	85	40	
20	35	10	50	0.86	105	40	
22	37	10	50	0.92	115	40	
29	45	10	50	1.17	135	40	
35	50	10	50	1.33	150	40	
STANDARDS : AS 2435-1992. ISO9001-2000							

Another Pacflex Quality Product

Pacific Flexibles pl
PO Box 904, Cloverdale, WA 6985, Australia
Office/Warehouse: 133 Chisholm Cr, Kewdale.

Tel +61-8-9453 2828
Fax +61-8-9359 1933
Email pg@pacflex.net